

RFT6MB

60cm Flat Canopy Rangehood

Euromaid



FEATURES

| | |
|---------------|-------------------------------------|
| Finish | Matte Black with Black Glass Fascia |
| Extraction | 1000m ³ /h |
| No. of Speeds | 4 |
| Control Type | Touch with White LED |
| Lighting | 1 x LED Strip |
| Filters | 2 x Baffles (Black) |

ACCESSORIES

| | |
|-------------------|---------------------|
| Carbon Filter | CF110 (Optional) |
| Recirculating Kit | IA150GRK (Optional) |
| Flue Extension | IAFXMBE1 (Optional) |




Scan for more info

RFT6MB

60cm Flat Canopy Rangehood

Euromaid

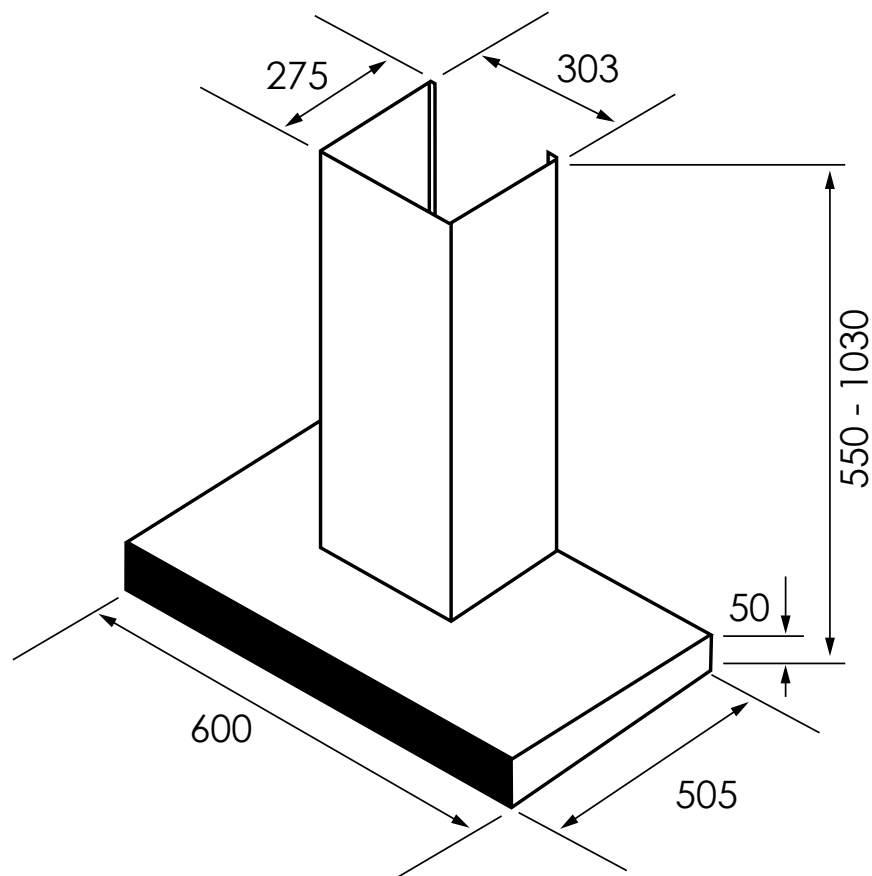

SPECIFICATIONS

| | |
|-----------------------|---------------------|
| Electrical Connection | 10A Plug |
| Power | 220 - 240V ~ / 50Hz |
| Motor Wattage | 380W |
| LED Wattage | 1 x 3.5W |
| Power Cord Length | 1m |

DIMENSIONS (W x H x D)

| | |
|----------------------------|------------------------|
| Carton (mm) | 660 x 560 x 310 |
| Product (mm) | 600 x 550 - 1030 x 505 |
| Recommended Clearance (mm) | 650 - 750* |
| Duct Diameter (mm) | 150 |

WEIGHT

| | |
|------------|----|
| Gross (kg) | 18 |
| Net (kg) | 15 |

WARRANTY

| | |
|---------|--------------------------|
| Product | 2 Years Parts and Labour |
|---------|--------------------------|

*Install the Rangehood in accordance with the manufacturer's instructions. For optimum performance, we recommend that all Rangehood clearances be a minimum of 650mm to a maximum of 750mm between the top of the cooking surface to the underside of the Rangehood. The distance may be reduced to 650mm to align with AS/NZS 5601.

VERSION NO. 20231114

euromaid.com.au